



INDOOR UNIT



ENERGY RECOVERY VENTILATOR

SPECIFICATIONS



Energy recovery core is AHRI Certified®

**Ventilation Type:**

Static plate, heat and humidity transfer

Airflow Range: 1,500–6,600 CFM

AHRI 1060 Certified Core: Six L125-G5

Standard Features:

TEFC premium efficiency motors
Motor starters
Non-fused disconnect
24VAC transformer/relay package
Cross-core differential pressure ports
Neoprene vibration isolators

Filters:

Total qty. 12, MERV 8: 20" x 20" x 2"

Unit Weight:

2,248–3,265 lbs., varies by option(s)

Max. Shipping Dimensions & Weight (on pallet):

116" L x 90" W x 90" H
3,439 lbs.

Motor(s):

Qty. 2, Belt drive blower/standard motor packages
with adjustable sheaves

Options:

Ultra premium efficiency (IE5+) motors with variable frequency drive (VFDs): both airstreams
Onboard VFDs: both airstreams
Shaft grounding ring on motors with VFDs
Fused disconnect
Integrated programmable controls: enhanced, premium
Bypass economizer damper (see DIM drawing):
dry-bulb temperature controls (standard),
enthalpy controls (option)
Class 1 low leakage motorized isolation dampers:
OA, EA or both airstreams
Spring vibration isolators
Factory mounted filter alarms: both airstreams
Double wall construction
Exterior paint: white, custom colors

Accessories:

Filters: MERV 13, 2" (shipped loose)
Automatic balancing damper: 4", 5", 6"
Digital time clock: wall mount (TC7D-W),
in exterior enclosure (TC7D-E)
Carbon dioxide sensor/control:
wall mount (CO2-W), duct mount (CO2-D)
IAQ sensor: wall mount (IAQ-W), duct mount (IAQ-D)
Motion occupancy sensor/control:
ceiling mount (MC-C), wall mount (MC-W)
Smoke detector: duct mount (SD-D)
BACnet fan control: wall mount (BACNETFC-W)
Indoor electric duct heater: EK series (1–175 kW)
Indirect gas-fired duct furnace: GH series (50–400 MBH);
Installed downstream of any fans

AIRFLOW PERFORMANCE

Blower RPM	External Static Pressure (Inches Water Column)																			
	0.25		0.50		0.75		1.00		1.25		1.50		1.75		2.00		2.25		2.50	
	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP
900	2836	1.2	2493	1.2	1855	1.1														
1000	3310	1.4	3067	1.3	2766	1.3	2356	1.2	1641	1.0										
1100	3746	1.8	3505	1.7	3226	1.6	2891	1.5	2464	1.4	1843	1.3								
1200	4277	2.4	4005	2.3	3698	2.1	3345	2.0	2924	1.9	2397	1.8	1684	1.6						
1300	4976	3.0	4665	2.9	4315	2.8	3910	2.7	3430	2.5	2847	2.4	2137	2.2						
1400	5689	3.7	5396	3.6	5058	3.5	4651	3.3	4143	3.2	3479	3.1	2612	3.0	1731	2.8				
1500	6096	4.2	5866	4.2	5601	4.1	5285	4.0	4892	3.9	4355	3.8	3488	3.7	2254	3.6				
1600	6267	4.8	6083	4.7	5876	4.7	5638	4.6	5354	4.6	4996	4.5	4489	4.5	3528	4.4	2072	4.3		
1700	6415	5.5	6255	5.4	6080	5.4	5884	5.3	5658	5.3	5391	5.2	5055	5.2	4589	5.2	3724	5.2	2256	5.1
1800			6578	6.3	6415	6.3	6234	6.2	6033	6.2	5803	6.1	5531	6.1	5198	6.0	4752	6.0	4045	5.9
1900													6442	7.2	6110	7.2	5705	7.1	5183	7.0

Operation in this zone outside of core airflow limits.

Operation in this zone will likely exceed FLA limits outside of core airflow limits.

Note: Brake horsepower (BHP) is for one blower motor package only. Airflow performance includes effect of clean, standard filter supplied with unit. For full operating range, see *CORES*.



ENERGY RECOVERY VENTILATOR



ELECTRICAL DATA



Electrical Specifications				Motor Starters (Standard)			Optional IE3 Efficiency Motor with VFDs			Optional IE5+ Efficiency Motor with VFDs		
HP	Volts	HZ	Phase	FLA per motor	Min. Cir. Amps	Max. Overcurrent Protection Device	FLA per motor	Min. Cir. Amps	Max. Overcurrent Protection Device	FLA per motor	Min. Cir. Amps	Max. Overcurrent Protection Device
3.0	208-230	60	Single	14.6-14	32.9	45	9-8.4	35.1	50	7.3-7.3	28.4	40
3.0	208-230	60	Three	9-8.4	20.3	25	9-8.4	20.3	25	7.3-7.3	16.4	20
	460	60	Three	4.2	9.5	15	4.2	9.5	15	3.7	8.3	15
	575	60	Three	3.3	7.4	15	3.3	7.4	15			
5.0	208-230	60	Three	13.9-13.4	31.3	45	13.9-13.4	31.3	45	10.5-10.5	23.6	30
	460	60	Three	6.7	15.1	20	6.7	15.1	20	5.3	11.9	15
	575	60	Three	5.3	11.9	15	5.3	11.9	15			
7.5	208-230	60	Three	20-19	45.0	60	20-19	45.0	60	17.4-17.4	39.2	50
	460	60	Three	9.5	21.4	30	9.5	21.4	30	8.7	19.6	25
	575	60	Three	7.6	17.1	20	7.6	17.1	20			

HE6XIN ENERGY RECOVERY VENTILATOR

ABBREVIATIONS
 EA: Exhaust Air to outside
 OA: Outside Air intake
 RA: Room Air to be exhausted
 FA: Fresh Air to inside

INSTALLATION ORIENTATION
 Unit must be installed in orientation shown.

NOTE
 1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.
 2. SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.

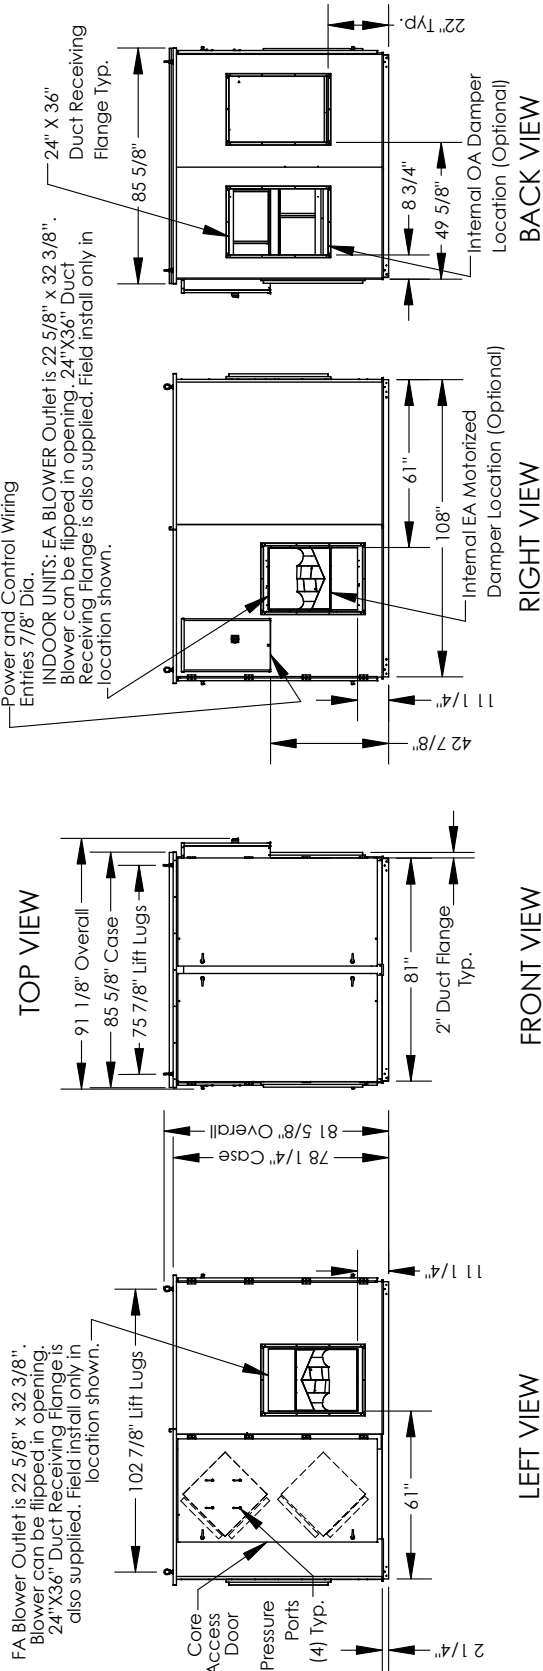
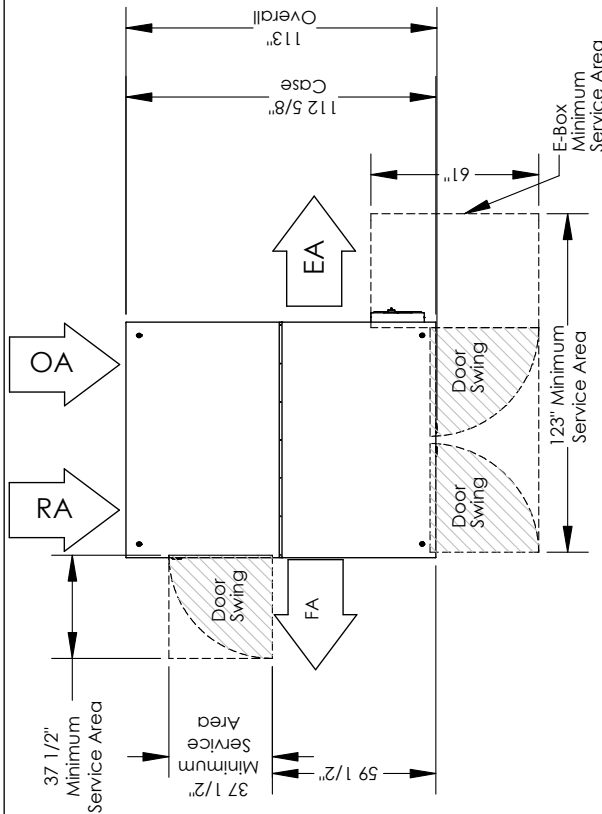


AIRFLOW ORIENTATION
 Available as shown in dimension drawing.



UNIT MOUNTING & APPLICATION
 Must be mounted as shown. Airstreams cannot be switched.

HE6XIN ENERGY RECOVERY VENTILATOR WITH BYPASS ECONOMIZER

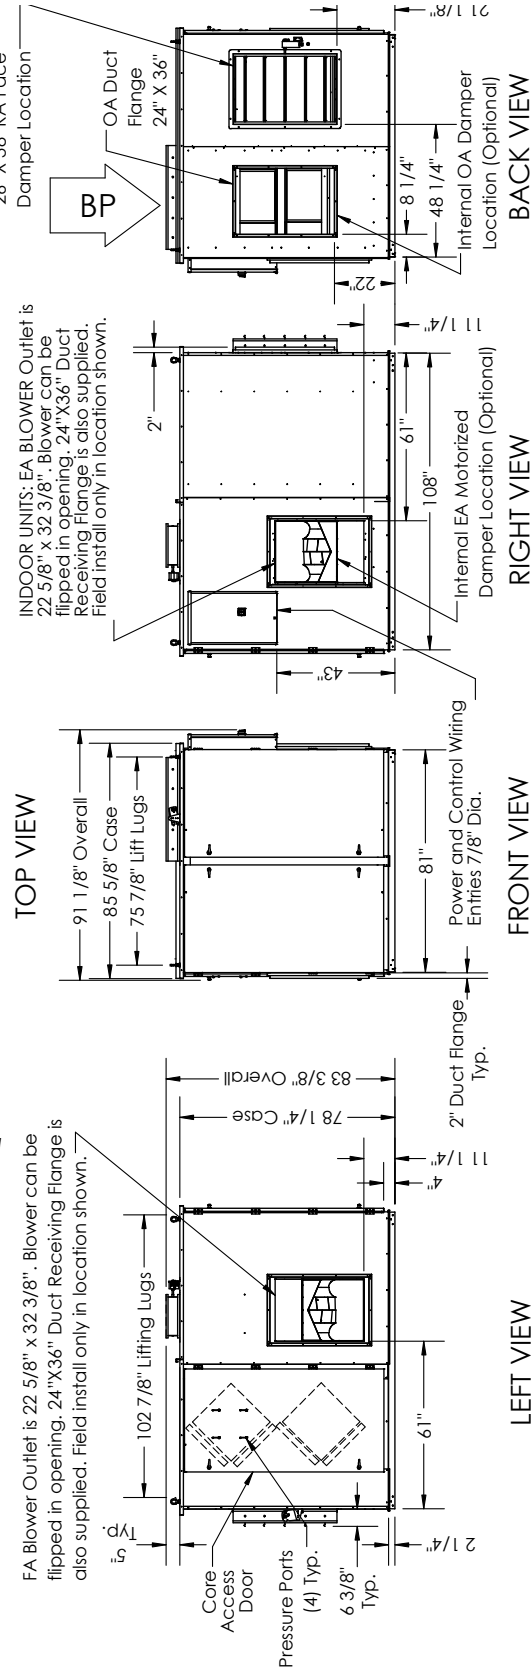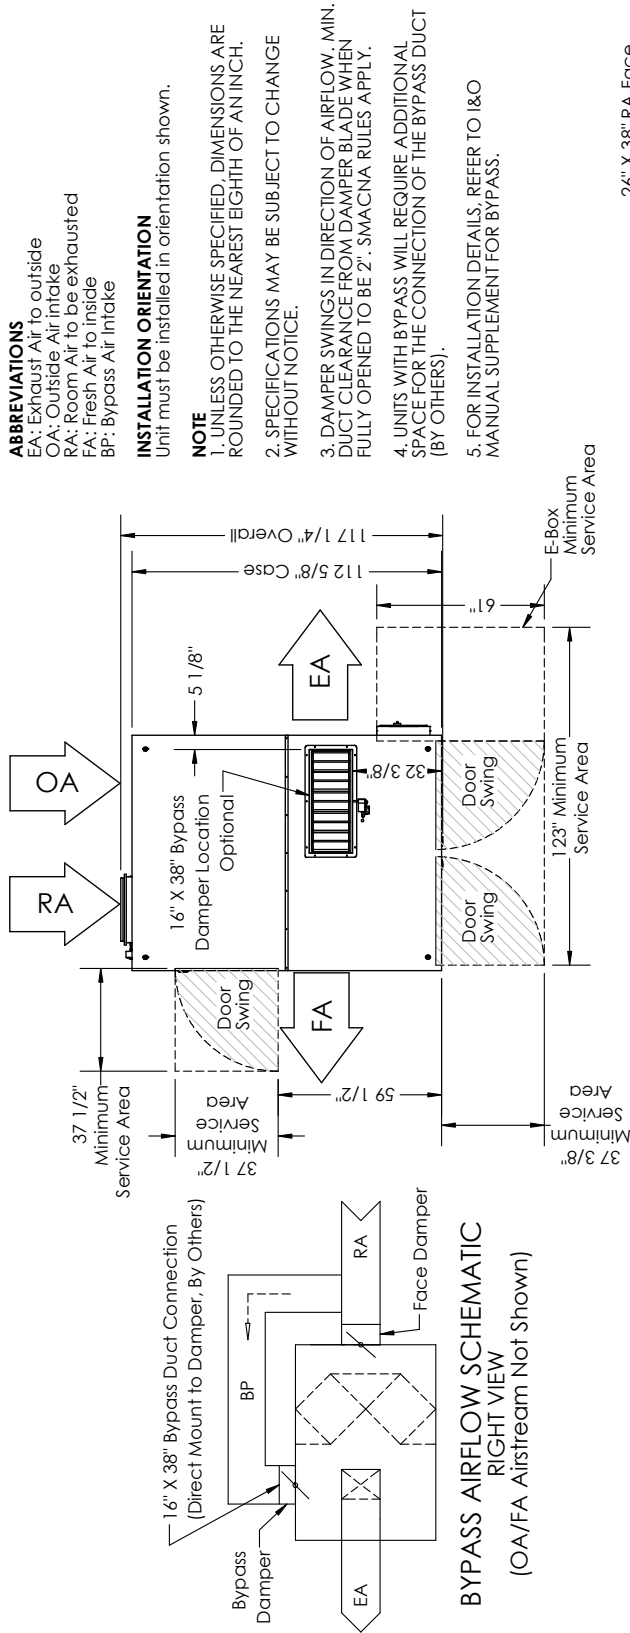

AIRFLOW ORIENTATION

Available as shown in dimension drawing.



UNIT MOUNTING & APPLICATION

Must be mounted as shown. Airstreams cannot be switched.